

# • Model: P825D5

Powered by PERKINS





### Generator Specification

Service I		ESP(2)
Power (kVA)	750	825
Power (kW)	600	660
Rated speed ( r.p.m)	1500	)
Standard voltage (V)	400/23	30V
Rated at power factor(cos phi)	0.8	



AGG Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1: 2008, EN 12601 : 2010

#### (1) PRP (Prime Power):

According to ISO8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

#### (2) ESP (Standby Power):


According to ISO 8528-1, It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Powers	ES	Р	PR	Р	Standby
Voltage (V)	KVA	KW	KVA	KW	Amps
415/240	825	660	750	600	1147.8
400/230	825	660	750	600	1190.8
380/220	825	660	750	600	1253.5

Performanc	e Data		
	Model	P825D5	
Engine brand		Perkins	
Engine model		4006-23TAG2A	
Spee	d control type	Electronic	
Phase 3		3	
Control system		Digital	
Starter motor voltage		24V	
Frequency		50HZ	
Engin	e speed (RPM)	1500	
	100% standby power	176	
Fuel Consumption (L/H)	100% prime power	161	
	75% prime power	122	
	50% prime power	83	

#### Standard reference Conditions

Note: Standard reference condition  $25^{\circ}$  (77<sup>°</sup>F) air inlet temp, 100m(328ft) A.S.L 30% relative humidity. Fuel consumption dat with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998, Class A2



Dimension and Weight			
Dimension	Open	Silent	
Length (L)	4260mm	6058mm	
Width (W)	1720mm	2438mm	
Height (H)	2230mm	2591mm	
Net Weight	5986KG	9986KG	
Fuel Tank (L)	-	-	

Note: This parameters allows for some acceptable deviations.



## Engine Specification: 4006-23TAG2A

Basic technical data	
No. of cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	4 stroke
Induction system	Turbocharged
Compression ratio	13.6:1
Bore	160mm
Stroke	190mm
Displacement	22.9L
All ratings certified to within	-
Estimated total weight	2524kg

TBD

TBD

**98°**C

**71-85℃** 

 $2.57 \text{ m}^2$ 

3 row of brass tubes

TBD

1.2 mm

0.78:1

TBD

Cooling system Total coolant capacity

-with radiator

-without radiator

Radiator face area

Rows and material

Number of blades

Fan diameter

Drive ratio

Pressure cap setting

Maximum top tank temp

Thermostat operation range

Induction system	
Clean filter	1.2kpa
Dirty filter	3.7kpa
Air filter type	Dry-paper

Lubrication system	
Total lub capacity	62L
Sump minimum	45L
Sump maximum	53L
Maximum engine operating angle	S
-front up, front down, right side	TBD
or left side	
Lubricating oil pressure	
-Relief valve opens	620 kPa
- at maximum no-load speed	TBD
Oil consumption at full load	
as a % of fuel consumption	0.1%

Insulated return
24 volts
70 amps
24 volts
9 kW


Fuel system		
Injection system	Direct	
Fuel injection pump	TBD	
Fuel atomiser	TBD	
Nozzel opening pressure	TBD	
	Electronic	
Fuel lift pump type	Electronic	
Fuel lift pump type - flow/hour	TBD	
- flow/hour	TBD	


General installation	Prime power
Gross engine power	654kW
Net engine power	632kW
Combustion air flow	64m³/min
Exhaust gas temperature outlet	430°C
Energy to coolant	200kW
Energy to exhaust	456kW




### Alternator Specification

Alternator	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standar	d) Star-serie
Terminals	12
Insulation type	H class
Winding Pitch	2/3
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Couping	Flexible disc



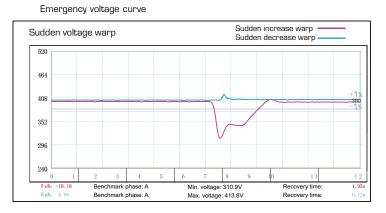

#### Emergency frequency curve

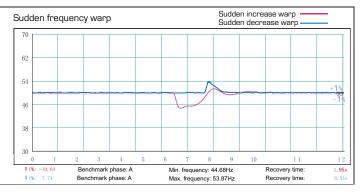

### Options

Engine	Alternator	Generator Sets	Fuel System
<ul><li>Water Jacket Pre-heater</li><li>Fuel heater</li></ul>	<ul> <li>Winding Temp measuring Instrument</li> <li>Alternator Pre-heater</li> <li>PMG</li> <li>Anti-damp and anti-corrosion treatment</li> <li>Anti-condensation heater</li> <li>Winding and bearing RTD</li> </ul>	<ul> <li>Tools with the machine</li> <li>Extended range fuel tank</li> <li>Bunded fuel tank</li> </ul>	<ul> <li>Low fuel level alarm</li> <li>Automatic fuel feeding system</li> <li>Fuel T-valves</li> </ul>
Canopy	Lub oil system	Cooling System	Control Panel
<ul> <li>Rental type Canopy</li> <li>Trailer</li> </ul>	<ul><li>Oil Pre-heater</li><li>Oil temp sensor</li></ul>	• Front heat protection	<ul> <li>Remote control panel</li> <li>ATS</li> <li>Synchronizing controller</li> <li>Adjustable earth leakage relay</li> </ul>



### **Control Panel**

#### Configuration

- Emergency stop button
- Protection MCB
- Battery charger
- Integrated aviation plug
- ATS connection
- Digital control module

#### Features

- 3 phase generator set monitoring
- Support of engines equipped with electronic control unit
- Comprehensive diagnostic message
- Automatic or manual start/stop of the gensets
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display
- Parameters adjustable via keyboard or PC
- Mains measurements ( 50HZ/60HZ)
- Generator measurements ( 50HZ/60HZ)
- Comprehensive shutdown or warning on fault condition
- 3 phase Generator protections
  - Over-/under voltage
  - -Over-/under frequency
  - -Current/voltage asymmetry
- -Over current/overload
- 3 phase AMF function
- Over-/under frequency
- Over-/under voltage
- Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface
- Modem communication support
- Hours counter
- Sealed to Ip65
- Event log



#### AGG UK | AGG China | AGG USA | AGG UAE

info@aggpower.co.uk | www.aggpower.co.uk

- Follow us @facebook.com/aggpowergroup
- Follow us @linkedin.com/company/agg-power fin
- Follow us @ AGGPOWER

#### All information in the document is substantially correct a the time of printing but may be subsequently altered by the company.

#### Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- User friendly set-up and button layout
- Module can be configured to suit individual applications
- PC software for simplified configuration
- Wide range of communication capabilities

#### Operation conditions

- Operation temp: -20 °C to + 70 °C
- Storage temp: -30 °C to + 80 °C
- Operating humidity: 95% w/o condensation
- Vibration : 5-25Hz,  $\pm 1.6$  mm
- 5-100Hz, a=4q • Shocks: a= 500m/s<sup>2</sup>

#### Options

- Ethernet interface (Remote monitoring and control)
- GSM modem/wireless internet (Remote monitoring and control)
- RS232-RS485 Dual port interface
- Synchronizing control panel
- Distribution board with sockets kit and power busbar
- Battery trickle charge ammeter
- Earth leakage protection
- Earth fault protection
- Low fuel level alarm
- Low fuel level shutdown
- High fuel level alarm
- Fuel transfer system control
- Low coolant level shutdown
- High lube oil temp shutdown
- Overload via alarm switch on breaker
- Engine coolant heater controls
- Control panel heater
- Speed adjust switch
- Oil temp displayed on LCD screen
- Additional 8 inputs and outputs

### Distributed by